


# RAINSCREEN DUO SLAB®

Non-combustible insulation for ventilated façades



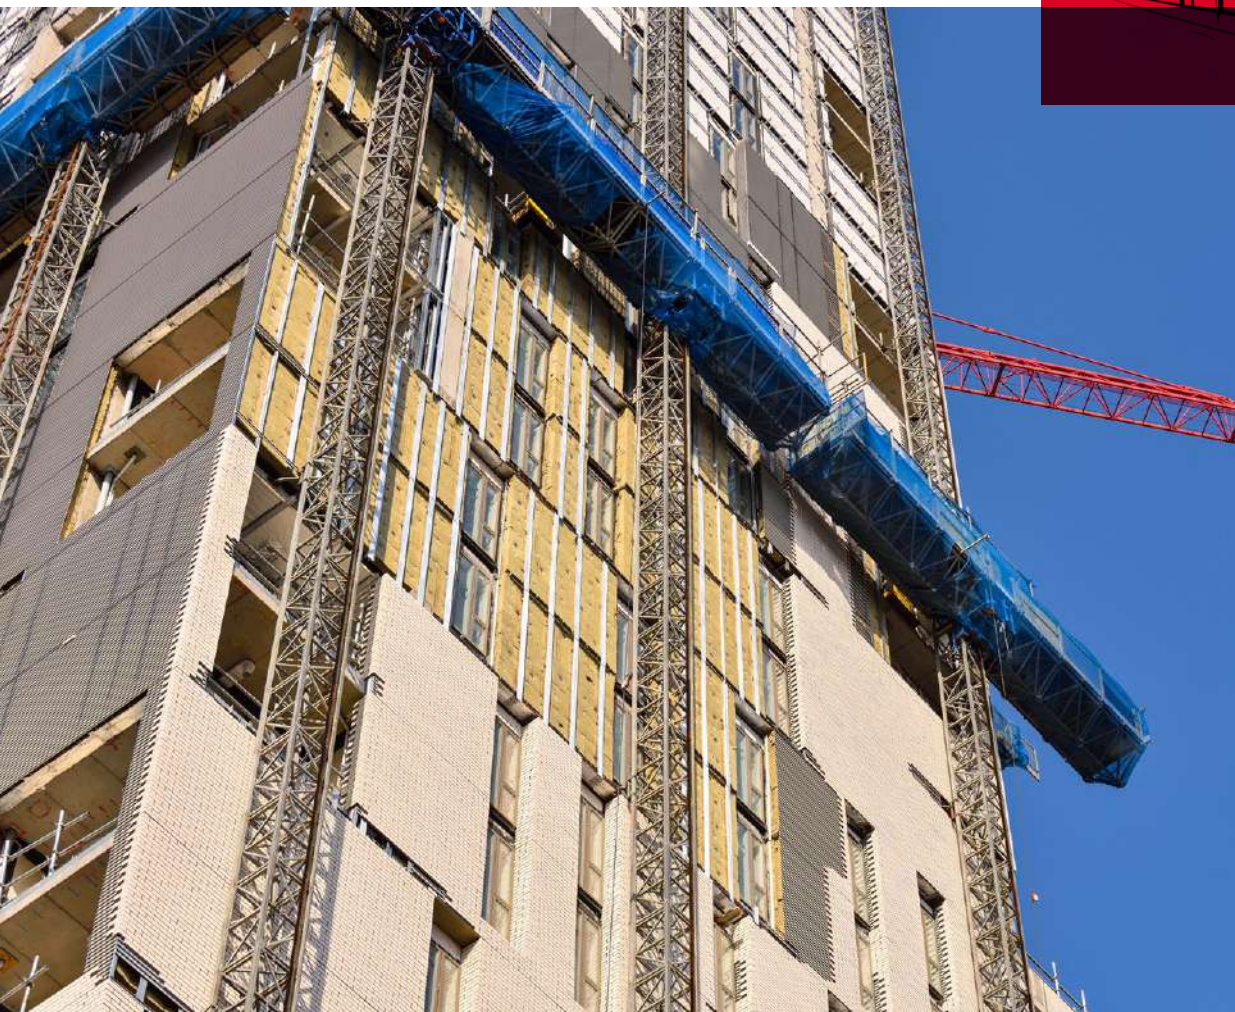

# RAINSCREEN DUO SLAB®

Effective non-combustible thermal and acoustic insulation for ventilated façades

RAINSCREEN DUO SLAB is a dual-density insulation specifically developed for use within ventilated cladding systems, as well as sealed systems such as curtain walling. Once installed, the robust outer surface of the slabs, in combination with a factory-applied water repelling agent, acts to resist rain ingress during construction.







## Advantages

- Designed for use on high rise buildings
- Water-repellent: Fibres impregnated with a water-repelling agent during manufacture
- Fewer fixings required for installation compared to standard stone wool slabs
- Robust front face resists damage and over-driving of fixings

## Description

RAINSCREEN DUO SLAB is a dual-density insulation, meaning that the outer layer of each slab is manufactured to a higher density than the remainder of the product. This results in a robust outer surface designed to withstand the rigours imposed on site, and a resilient inner face designed to accommodate any irregularities in the substrate.


A water-repelling agent is added to the product during manufacture, which in combination with a robust outer surface and random fibre orientation, prevents water transmission through the insulation layer. As such the slab is well-designed for use in conditions of severe climatic exposure.

The product can be easily fitted around brackets and other awkward details, and when tightly butt jointed the fibres of adjacent slabs will knit together to provide a continuous thermal performance – eliminating heat losses that could otherwise be caused by gaps and joints.

Its unique dual-density construction also means that RAINSCREEN DUO SLAB requires fewer fixings, making it a cost-effective solution that is quick to install.

## Applications

RAINSCREEN DUO SLAB is designed for use within ventilated cladding systems, as well as sealed systems such as curtain walling.

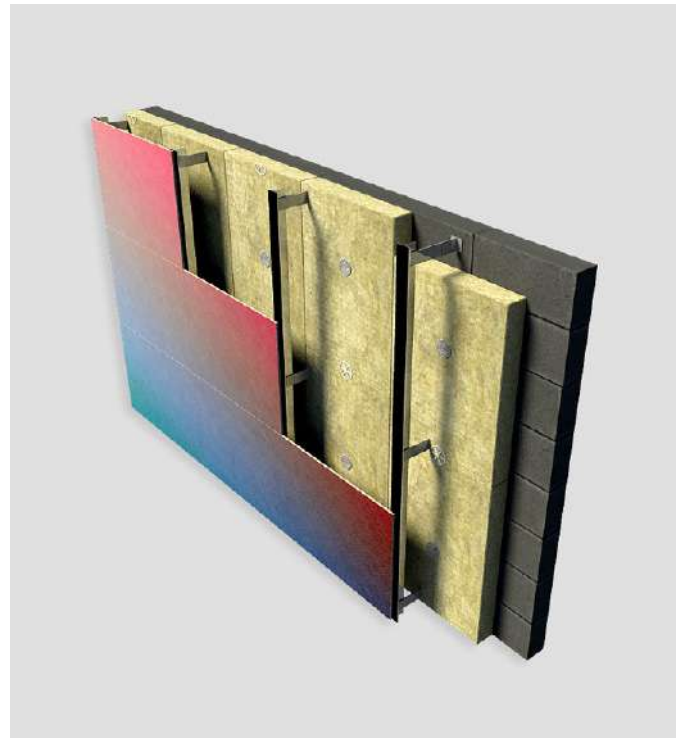

## Performance

### Fire

Rated Euroclass A1 when assessed to EN 13501-1 using test data from reaction-to-fire tests.

### Wind resistance

RAINSCREEN DUO SLAB fixed as indicated in Figure 1 has successfully undergone wind resistance testing by the Building Research Establishment.

Wind loading fatigue tests were used to simulate the performance of the slabs when fully exposed and subjected to fluctuating wind loads during the construction stages of buildings. The tests simulated and exceeded the maximum UK basic wind speed of 56 m/s as defined by BS CP3: Chapter 5: Part 2: 1972. Test report reference BRE GI2801.

### Water resistance



ROCKWOOL stone wool repels liquid water due to its fibre orientation and the presence of water-repellent additives.

### Acoustic performance

The airborne sound reduction of several typical rainscreen build-ups incorporating RAINSCREEN DUO SLAB was tested at the Sound Research Laboratories (SRL), with results of up to  $R_w$  62 dB. For more information, please see the 'Acoustic Performance of Rainscreen Façade Systems' brochure available on our website.

### Condensation control

The vapour resistivity of ROCKWOOL mineral wool is 5.9MN<sub>s</sub>/gm. The slabs therefore reduce the risk of condensation, allowing natural drying-out of the structure. See typical relative humidity / temperature graph below.

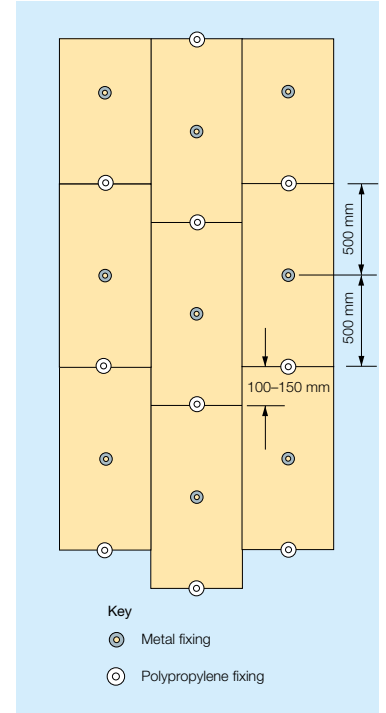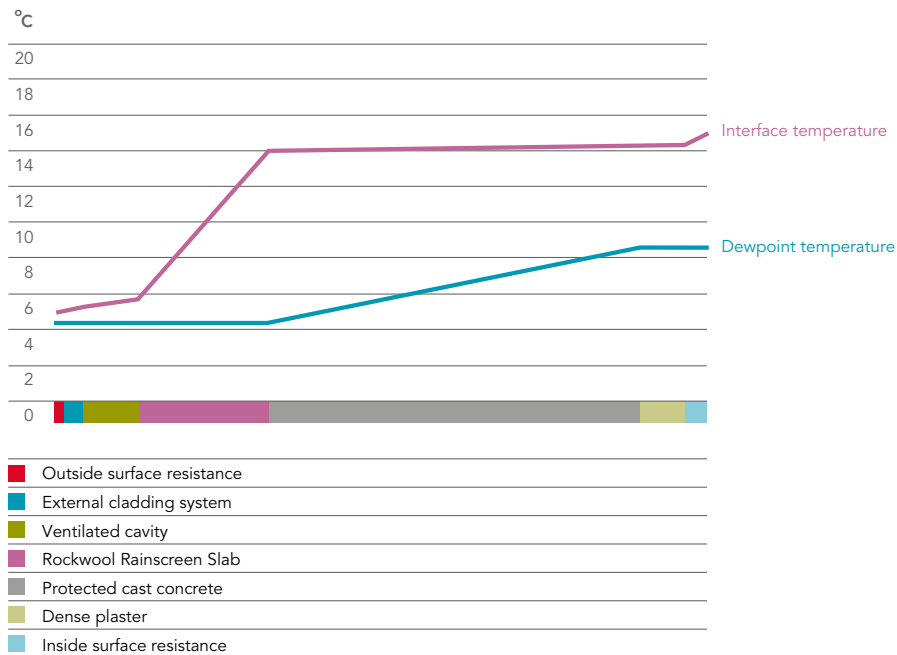

**Figure 1**  
Typical fixing pattern with 3 fixings per square metre

## Technical information

### Standards and approvals

RAINSCREEN DUO SLAB has been examined by the British Board of Agrement (BBA) and granted Certificate 17/5402 for use in Ventilated Rainscreen Cladding Systems on both domestic and non-domestic buildings.

RAINSCREEN DUO SLAB satisfies the requirements of BS EN 13162 – “Thermal insulation products for buildings. Factory made mineral wool (MW) products”.

### Dimensions


Length (mm)	Width (mm)	Standard thicknesses (mm)
1200	600	50 / 60 / 75 / 100 / 110 / 125 / 150 / 180 / 190 / 200

### U-values

#### Construction 1

RAINSCREEN DUO SLAB® between Metal Bracket System on 150mm Reinforced Concrete or dense block wall. Internal finishes: (a) plaster (b) plasterboard on dabs

Internal finish	a	b
Thickness (mm)	U-Values W/m <sup>2</sup> K	U-Values W/m <sup>2</sup> K
125	0.35	0.34
150	0.32	0.31
175	0.28	0.28
200	0.26	0.26
275	0.22	0.22
325	0.20	0.20

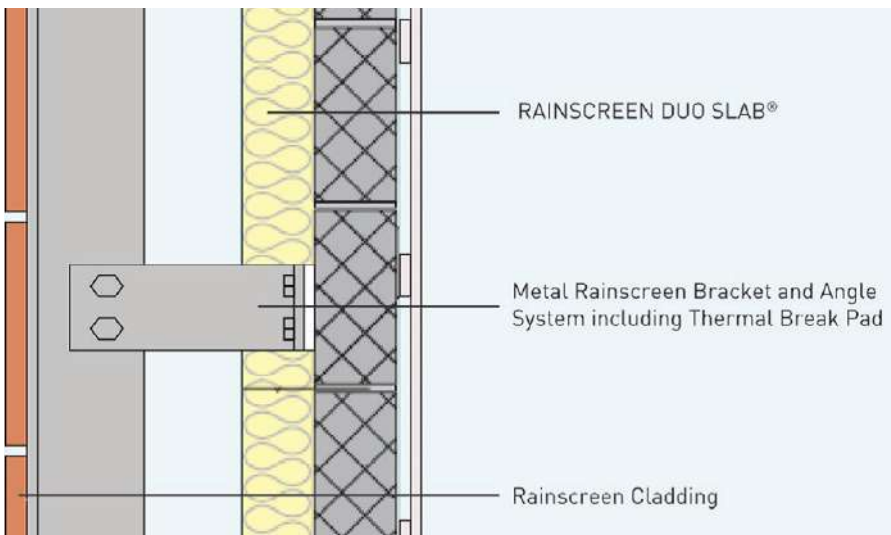


### Notes

- Tables based on pointloss scenarios where only the rainscreen brackets bridge the thermal insulation layer.
- A thermal bridging allowance of 0.1W/m<sup>2</sup>K has been added to the wall U-value (e.g. a calculated U-value of 0.25 will be increased to 0.35W/(m<sup>2</sup>K) to allow for predicted bridging). (Based on data supplied by the BRE using a 5mm thick thermal break pad and brackets at 600mm x 600mm fixing matrix).

**Construction 2**


RAINSCREEN DUO SLAB® on 150mm deep metal studs at 600mm centres with 140mm ROCKWOOL FLEXI installed within the frame.

Thickness (mm)	ROCKWOOL FLEXI® thickness (mm)	U-Values W/m <sup>2</sup> K
75	140	0.25
100	140	0.22
125	140	0.20
150	140	0.18
180	140	0.17

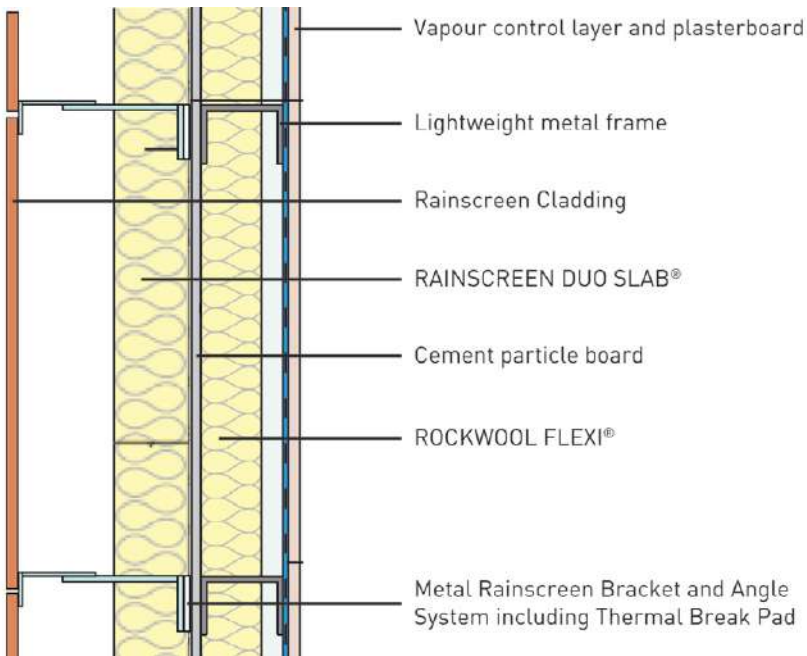

**Notes**


- U-values shown have been calculated with a thermal bridging allowance which has been determined using a 3-Dimensional analysis in accordance with BR443. The systems modelled included 8mm ROCKPANEL Rockclad and FastFrame rainscreen Brackets

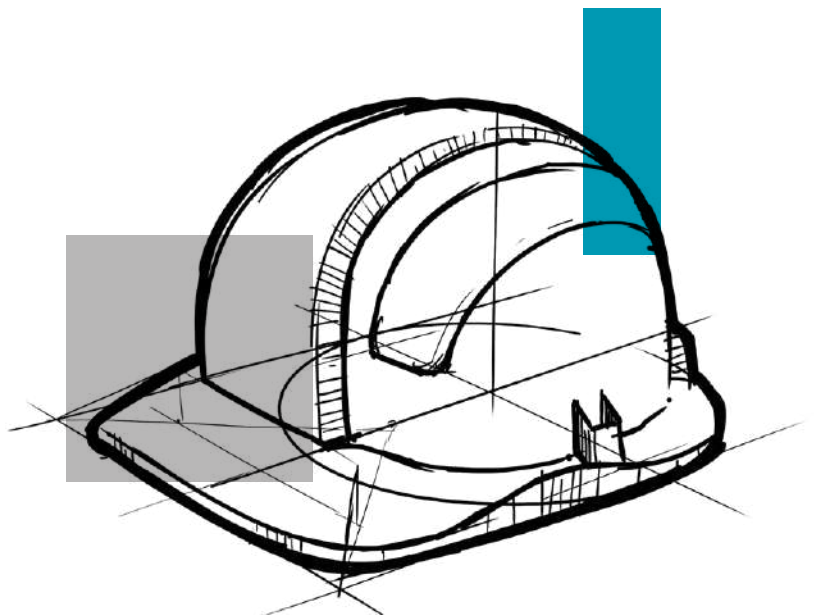

**Construction 3**

RAINSCREEN DUO SLAB® between timber rails on 150mm Dense Concrete or dense block wall. Internal finishes: (a) plaster-Lambda 0.180W/mk (b) Plasterboard on dabs

Internal finish	a	b
Thickness (mm)	U-Values W/m <sup>2</sup> K	U-Values W/m <sup>2</sup> K
100	0.35	0.34
125	0.29	0.28
140	0.26	0.26
150	0.25	0.24
200	0.19	0.19
225	0.17	0.17

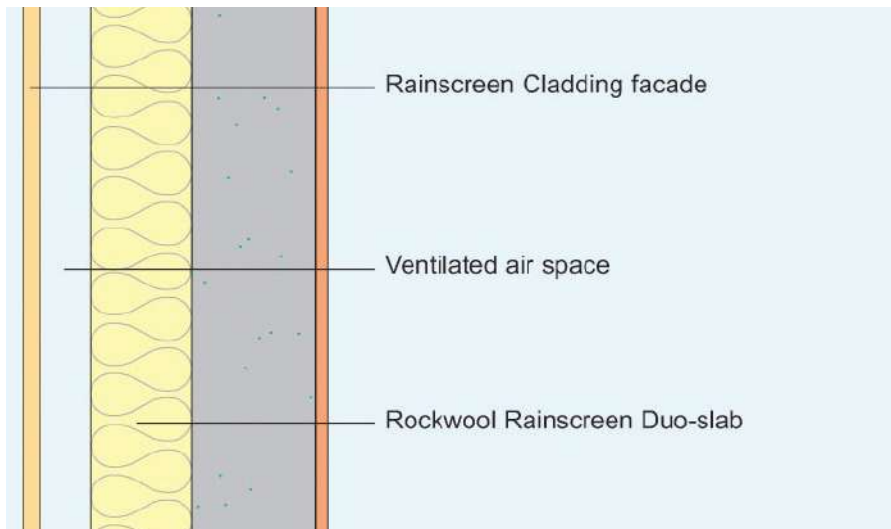

**Typical specification**

The rainscreen insulation is to be RAINSCREEN DUO SLAB® ..... mm thickness, as manufactured by ROCKWOOL Limited, Pencoed, Bridgend cf 35 6ny, secured to the substrate with metal and polypropylene fixings in accordance with RAINSCREEN DUO SLAB® Data sheet.

Horizontal joints should be staggered and all joints tight butted.

The Slabs should be fixed with the robust (patterned) surface facing outwards.

## Installation

### Work on site

RAINSCREEN DUO SLAB® are light and easy to cut to any shape with a sharp knife. They are shrink wrapped in polyethene and supplied on pallets that are shrouded with a waterproof hood suitable for outside storage. Once installed, due to their robust outer facing surface, the slabs can be left unprotected for an extended period of time prior to fixing the rainscreen cladding.

### Workability

Light and easy to handle, the slabs are easy to cut to shape or size with a sharp knife, to suit the cladding system.

### Rainscreen cladding – Metal rail systems

To obtain the optimum performance of the system, the Slabs should be applied with the patterned side facing outwards (see Figure 4). The resilient inner layer will accommodate surface irregularities (see Figure 3).

Close butt the slabs at all vertical and horizontal joints.

Stagger the horizontal joints of the insulation in accordance with good fixing practice.

Fix using a combination of metal and polypropylene fixings in accordance with the detail shown in Figure 1. Fixings should have a minimum head diameter of 70 mm.

RAINSCREEN DUO SLAB® should be cut and tightly fitted around wall brackets where these occur. See 'Construction 1' on the back page for typical U- values relating to this construction.

### Suitable Fixing Manufacturers

Hilti: 0800 886100

ITW Construction Products Ltd.: 01592 771132

Ejot: 01977 687040

Fischer: 01491 827900

### Rainscreen cladding – Timber rail application

The Slabs should be tightly fitted between the treated timber rails prior to the installation of the external cladding boards and mechanically fixed as shown in Figure 2. Provision should be made for a minimum 25 mm ventilated air space behind the cladding boards.

All horizontal joints should be closely butted to optimise the insulation performance.

See 'Construction 3' on the back page for typical U-values relating to this construction.

## Specification Clauses

The following NBS Plus clauses include RAINSCREEN DUO SLAB®: H92:776, H20:10, H11:110, P10:42, 217

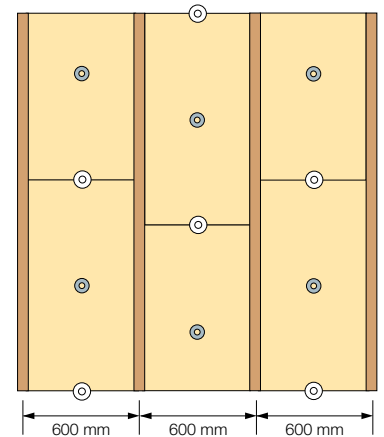


Figure 2

Typical fixing pattern between treated timber cladding rails

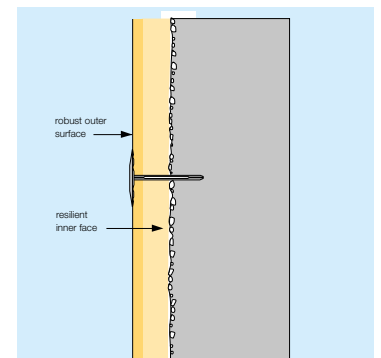


Figure 3

Dual density

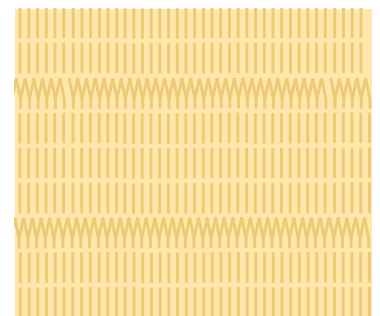


Figure 4

Textured outer face of slab



## Sustainability

As an environmentally conscious company, ROCKWOOL promotes the sustainable production and use of insulation and is committed to a continuous process of environmental improvement.

All ROCKWOOL products provide outstanding thermal protection as well as four added benefits:



**Fire resistance**



**Acoustic comfort**



**Sustainable materials**



**Durability**

## Environment

Made from a renewable and plentiful naturally occurring resource, ROCKWOOL insulation saves fuel costs and energy in use and relies on trapped air for its thermal properties.

ROCKWOOL insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

ROCKWOOL is approximately 97% recyclable. For waste ROCKWOOL material that may be generated during installation or at end of life, we are happy to discuss the individual requirements of contractors and users considering returning these materials to our factory for recycling.

## Health & Safety

The safety of ROCKWOOL stone wool is confirmed by current UK and Republic of Ireland health & safety regulations and EU directive 97/69/EC: ROCKWOOL fibres are not classified as a possible human carcinogen.

A Material Safety Data Sheet is available and can be downloaded from [www.rockwool.co.uk](http://www.rockwool.co.uk) to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).



## Interested?

For further information, contact the Technical Solutions Team on 01656 868490 or email [technical.solutions@rockwool.co.uk](mailto:technical.solutions@rockwool.co.uk)

Visit [www.rockwool.co.uk](http://www.rockwool.co.uk) to view our complete range of products and services.

*Copyright ROCKWOOL September 2018.*

### The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the largest assets in the ROCKWOOL Group, and thus well protected and defended by us throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion. You must apply for a Trade Mark Usage Agreement. To apply, write to:  
[marketcom@rockwool.com](mailto:marketcom@rockwool.com).

### Trademarks

The following are registered trademarks of the ROCKWOOL Group:

ROCKWOOL®

ROCKCLOSE®

RAINSCREEN DUO SLAB®

HARDROCK®

ROCKFLOOR®

FLEXI®

BEAMCLAD®

FIREPRO®

### Disclaimer

ROCKWOOL Limited reserves the right to alter or amend the specification of products without notice as our policy is one of constant improvement. The information contained in this brochure is believed to be correct at the date of publication. Whilst ROCKWOOL will endeavour to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law, or other developments affecting the accuracy of the information contained in this brochure. The applications referred to within the brochure do not necessarily represent an exhaustive list of applications. ROCKWOOL Limited does not accept responsibility for the consequences of using ROCKWOOL in applications different from those described within this brochure. Expert advice should be sought where such different applications are contemplated, or where the extent of any listed application is in doubt.

© ROCKWOOL 2018. All rights reserved.

### Photography and Illustrations

The product illustrations are the property of ROCKWOOL Ltd and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement. To apply, write to:  
[marketcom@rockwool.com](mailto:marketcom@rockwool.com).

**Notes**



September 2018

**ROCKWOOL Limited**

Pencoed  
Bridgend  
CF35 6NY

Tel: 01656 862 621

[info@rockwool.co.uk](mailto:info@rockwool.co.uk)

[rockwool.co.uk](http://rockwool.co.uk)

