

Drywall Screws



Dense Board Screw

Black Phosphate



PHILLIPS EN 14592:2008

CORROSION RATING



Clean, dry & low humidity environments



ALL STUD WORK

Designed for attaching dense board to timber stud work. The super sharp point and high low thread is specifically designed for an excellent fixing into timber.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	-----------------	----------------	--------------------	--------------------

BOX (DRIVER BIT INCLUDED)

00030DRYD	3.9 x 30	PH2	1,000	16	384
00045DRYD	3.9 x 45	PH2	1,000	8	192
00055DRYD	3.9 x 55	PH2	1,000	6	144

TYPE - DRY SUB TYPE - DRY03

Reverse Thread Screw

Black Phosphate



PHILLIPS EN 14592:2008

CORROSION RATING



Clean, dry & low humidity environments



METAL STUD WORK

The reverse thread is designed to assist countersinking in dense board or hard boards.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	-----------------	----------------	--------------------	--------------------

BOX (DRIVER BIT INCLUDED)

00038DRYR	3.9 x 38	PH2	1,000	12	288
00042DRYR	3.9 x 42	PH2	1,000	9	216

TYPE - DRY SUB TYPE - DRY04

Self-Drilling Screw

Zinc



PHILLIPS EN 14592:2008

CORROSION RATING



Clean, dry & low humidity environments



METAL STUD WORK

Self-drilling point to aid fixing plasterboard to wall /ceiling track systems with a max. of 2.0mm thickness. Note: 4.2 diameter screws drill 3.0mm and 4.8 diameter screws drill 4.0mm)

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	-----------------	----------------	--------------------	--------------------

BOX (DRIVER BIT INCLUDED)

00025PSDD	3.5 x 25	PH2	1,000	15	384
00032PSDD	3.5 x 32	PH2	1,000	12	324
00038PSDD	3.5 x 38	PH2	1,000	12	288
00042PSDD	3.5 x 42	PH2	1,000	12	216
00050PSDD	3.5 x 50	PH2	1,000	9	144
00055PSDD	3.5 x 55	PH2	500	6	288
00065PSDD	3.9 x 65	PH2	500	12	288
00075PSDD	4.2 x 75	PH2	500	12	192
00100PSDD	4.8 x 100	PH2	500	8	144
00125PSDD	4.8 x 125	PH2	100	6	540

TYPE - PSD SUB TYPE - PSD01

TIMBAG

00032PSDDB	3.5 x 32	PH2	400	5	600
00042PSDDB	3.5 x 42	PH2	320	5	600

TYPE - BAG SUB TYPE - BAG10

Cement Board Screws



1,500 Hours Salt Spray Resistance

Twin-Cut Point

Exterior Plus



PHILLIPS EN 14592:2008

CORROSION RATING



Industrial & coastal areas with an aggressive salt atmosphere



ALL STUD WORK

Twin-cut point with a hi-low thread for fixing to timber and thin sheet metal (max. 0.6mm)

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	-----------------	----------------	--------------------	--------------------

BOX (DRIVER BIT INCLUDED)

217283	4.2 x 32	PH2	200	50	1200
217796	4.2 x 42	PH2	200	35	840

TYPE - CBS SUB TYPE - CBS01

Self-Drilling Point

Exterior Plus



PHILLIPS EN 14592:2008

CORROSION RATING



Industrial & coastal areas with an aggressive salt atmosphere



METAL STUD WORK


Self-drilling point with self-tapping thread for fixing to steel (max. 3.0mm)

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	-----------------	----------------	--------------------	--------------------


BOX (DRIVER BIT INCLUDED)

217154	4.2 x 32	PH2	200	50	1200
217228	4.2 x 42	PH2	200	35	840

TYPE - CBS SUB TYPE - CBS01

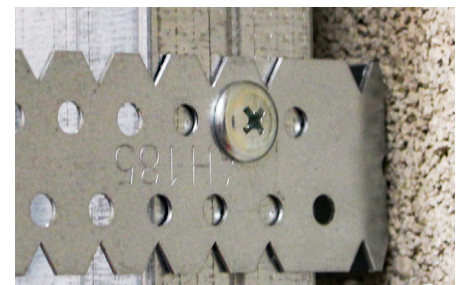

Metal Framing Screws



Page 45